2-port Modbus Gateway

4-port Modbus Gateway



### **Features**

- Provides 2 x 10/100 Mbps Ethernet ports for LAN redundancy
- Integration of Modbus TCP and Modbus RTU/ASCII networks
- Supports up to 921.6 kbps, and any baud rate setting
- Supports up to 16 connections and 32 requests simultaneously
- Auto searching slave ID over configuration utility
- Software selectable RS-232/422/485 communication
- Mounts on DIN-rail and Wall mount
- Built-in 15 KV ESD protection for all serial signals
- Automatic RS-485 data flow control

## Introduction

The EKI-1200 series Modbus/ASCII serial devices to newer TCP/IP networked-based devices. The EKI-1221/1222/1224 feature two independent Ethernet ports and MAC addresses to provide a redundant networking mechanism to guarantee Ethernet networking reliability. They provide a simple and cost-effective way to bring the advantage of remote management and data accessibility to thousand of devices that can not connect to a network. The EKI-1221/1222/1224 provide a feature that can allow users to select master or slave operation mode for each serial port. They not only allow an Ethernet master to control serial slaves, but also allow serial masters to control Ethernet slaves.

# **Specifications**

#### **Ethernet Communications**

Compatibility IEEE 802.3, IEEE 802.3u
 Speed 10/100 Mbps

No. of Ports

• Port Connector 8-pin RJ45

Protection
 Built-in 1.5 KV magnetic isolation

#### **Serial Communications**

Port Type
 RS-232/422/485, software selectable

■ **No. of Ports** EKI-1221: 1 EKI-1222: 2

EKI-1222: 2 EKI-1224: 4 DB9 male

Port Connector DB9Data Bits 7, 8Stop Bits 1, 2

Parity None, Odd, Even, Space, Mark
 Flow Control XON/XOFF, RTS/CTS, DTR/DSR

Baud Rate
 Serial Signals
 Serial Signals
 Serial Signals
 50 bps ~ 921.6 kbps, any baud rate setting
 RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND

RS-422: TXD+, TXD-, RXD+, RXD-, GND

RS-485: Data+, Data-, GND

Protection 15 KV ESD for all signals

Software

**OS Support** 32-bit/64-bit Windows XP/Vista/7/8, Windows Server 2003/2008/2008 R2/2012, Windows CE 5.0, and Linux

Utility Software
 Advantech EKI Device Configuration Utility

Operation Modes
 Modbus RTU Master/Slave mode
 Modbus ASCII Master/Slave mode

Configuration Windows Utility, Web Browser

Protocols
 Modbus RTU, Modbus TCP, Modbus ASCII

#### General

• **LED Indicators** System: Power, System Status

LAN: Speed, Link/Active

Serial: Tx, Rx

Reboot Trigger
 Built-in WDT (watchdog timer)

#### **Mechanics**

■ **Dimensions (W x H x D)** EKI-1221/1222: 37 x 140 x 95 mm (1.46" x 5.51" x

3.74")

EKI-1224: 55 x 140 x 95 mm (2.17" x 5.51" x 3.74")

• **Enclosure** Metal with solid mounting hardware

Mounting DIN-rail, Wall
 Weight EKI-1221: 0.592 Kg
 EKI-1222: 0.6 Kg
 EKI-1224: 0.668 Kg

**Power Requirements** 

■ **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs

 Power Connector
 Power Consumption
 EKI-1221: 2 W EKI-1222: 2.5 W EKI-1224: 4 W

Environment


Operating Temperature -10 ~ 60°C (14 ~ 140°F)
 Storage Temperature -20 ~ 80°C (-4 ~ 176°F)

• Operating Humidity 5 ~ 95% RH

**Regulatory Approvals** 

■ **EMC** CE, FCC Part 15 Subpart B (Class A)

Safety UL/cUL 60950-1
 Hazardous Location Class I, Division 2

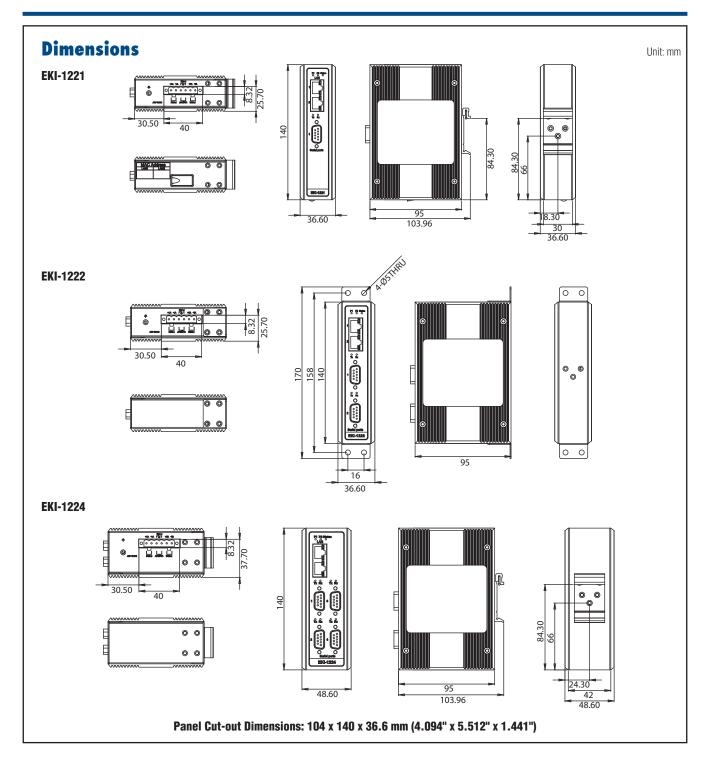

# **Ordering Information**

■ EKI-1221 1-port Modbus Gateway

**EKI-1222** 2-port Modbus Gateway **EKI-1224** 4-port Modbus Gateway

• OPT1-DB9 D-Sub9 to Terminal Converter